

With plate CODE: UL-DSR-006-9 To be cemented CODE: UL-DSR-006-9C

# Bollards

PRIMO A900

 THE<sup>®</sup>  
ITALIAN  
LAB



**Dimensions:**

H 900, D. bollard 152, D. flange 220 mm



**Weight:**

With plate 11 Kg, To be cemented 14 Kg

The PRIMO A900 bollard is made of a galvanized and polyester powder coated steel tube bar, diameter 152 mm, thickness 30/10, or stainless steel.

Ground fixing can be done by placing the extended part of the bollard 250 mm deep into concrete foundations, under a flange without holes; or by using a flange with n.4 D. 10 mm holes for suitable bolts (not supplied)

With plate  
 CODE: UL-DSR-006-9

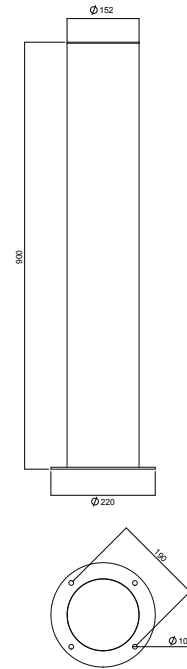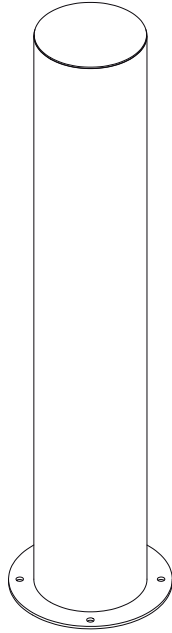

To be cemented  
 CODE: UL-DSR-006-9C

