

With plate CODE: UL-DSR-007-9 To be cemented CODE: UL-DSR-007-9C

# Bollards

PRIMO B900

 THE<sup>®</sup>  
ITALIAN  
LAB



**Dimensions:**

H 900, D. bollard 102 mm, D. flange 170 mm



**Weight:**

With plate 5.1 Kg, To be cemented 6.5 Kg

The PRIMO B900 bollard is made of a galvanized and polyester powder coated steel tube bar, diameter 102 mm, thickness 20/10, or stainless steel.

Ground fixing can be done by placing the extended part of the bollard 250 mm deep into concrete foundations, under a flange without holes; or by using a flange with n. 4 D. 10 mm holes for suitable bolts (not supplied)

With plate  
 CODE: UL-DSR-007-9

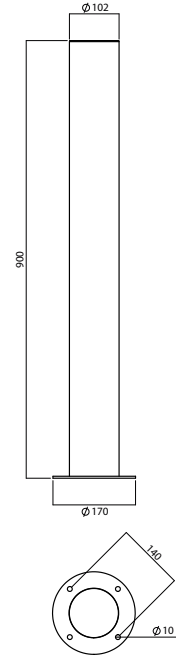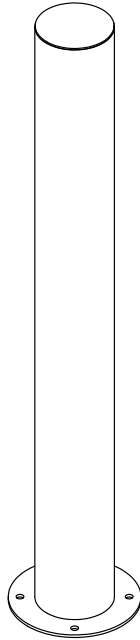

To be cemented  
 CODE: UL-DSR-007-9C

