

With plate CODE: UL-DSR-006-4 To be cemented CODE: UL-DSR-006-4C

# Bollards

PRIMO A450



**5** THE<sup>®</sup>  
ITALIAN  
LAB

**Dimensions:**



H 450, D. bollard 152, D. flange 220 mm

**Weight:**

With plate 5.9 Kg, To be cemented 9 Kg

The PRIMO A450 bollard is made of a galvanized and polyester powder coated steel tube bar, diameter 152 mm, thickness 30/10, or stainless steel. Ground fixing can be done by placing the extended part of the bollard 250 mm deep into concrete foundations, under a flange without holes; or by using a flange with n. 4 D. 10 mm holes for suitable bolts (not supplied)

With plate  
 CODE: UL-DSR-006-4

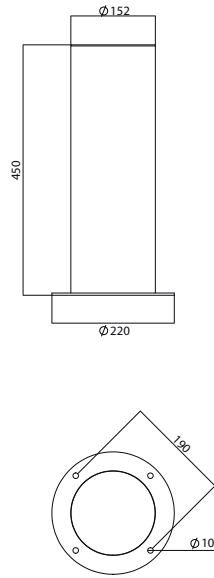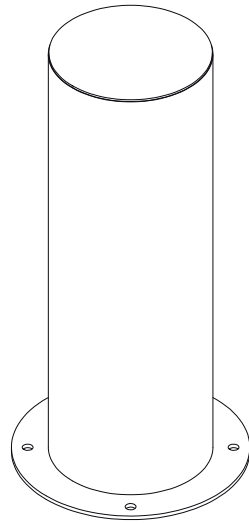

To be cemented  
 CODE: UL-DSR-006-4C

